


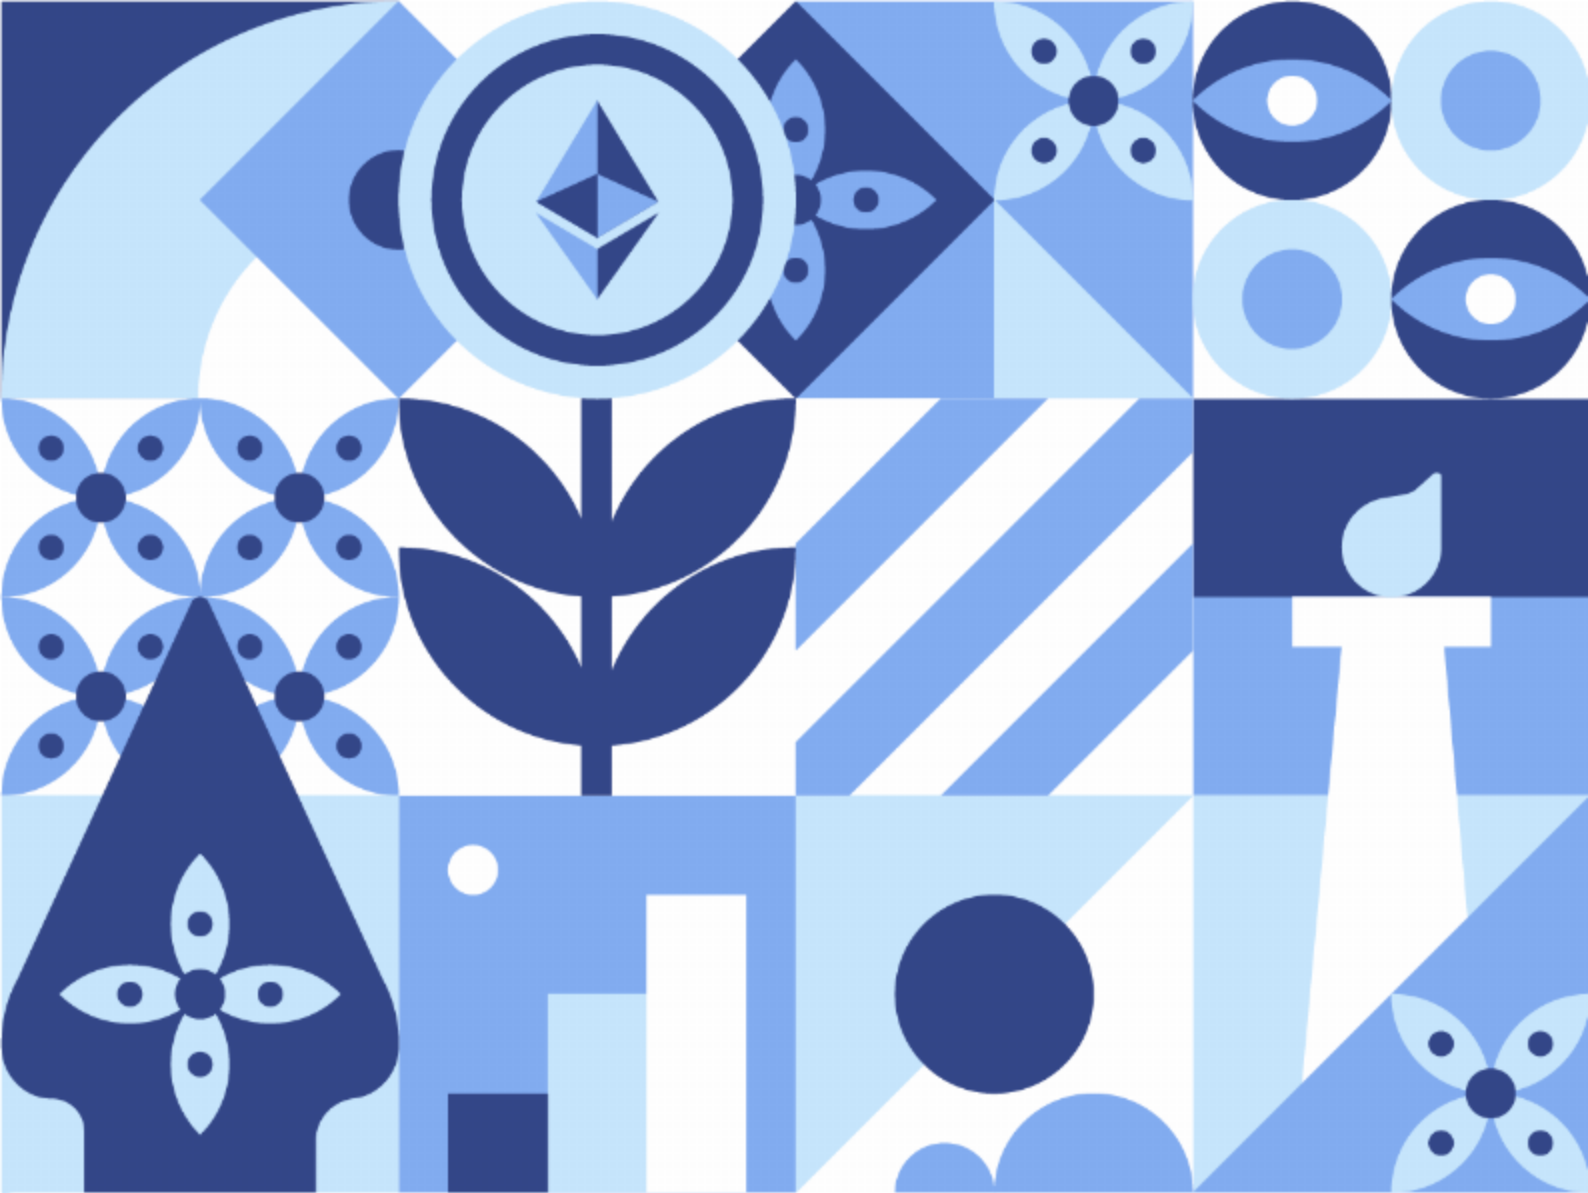

ShibaCrypt Smart Contract Audit Report

TABLE OF CONTENTS

[Audited Details](#)

- Audited Project
- Blockchain
- Addresses
- Project Website
- Codebase

[Summary](#)

- Contract Summary
- Audit Findings Summary
- Vulnerabilities Summary

[Conclusion](#)

[Audit Results](#)

[Smart Contract Analysis](#)

- Detected Vulnerabilities

[Disclaimer](#)

[About Us](#)

AUDITED DETAILS

Audited Project

Project name	Token ticker	Blockchain
ShibaCrypt	SCX	Ethereum

Addresses

Contract address	0xD15bC1F6408d11c2513444B9d0253efd838AF781
Contract deployer address	0xD15bC1F6408d11c2513444B9d0253efd838AF781

Project Website

https://scxdao.com/

Codebase

https://etherscan.io/address/0xD15bC1F6408d11c2513444B9d0253efd838AF781#code

SUMMARY

ShibaCrypt is a token on the ERC20 blockchain inspired by the decentralized community-led vision of the original Shiba project, and launched by a former member of the Shiba development team. The project relies on community governance via DAO and provides web applications for various blockchain utilities.

Contract Summary

Documentation Quality

ShibaCrypt provides a very good documentation with standard of solidity base code.

- The technical description is provided clearly and structured and also don't have any high risk issue.

Code Quality

The Overall quality of the basecode is standard.

- Standard solidity basecode and rules are already followed by ShibaCrypt with the discovery of several low issues.

Test Coverage

Test coverage of the project is 100% (Through Codebase)

Audit Findings Summary

- SWC-100 SWC-108 | Explicitly define visibility for all state variables on lines 701 and 726.
- SWC-101 | It is recommended to use vetted safe math libraries for arithmetic operations consistently on lines 110, 142, 165, 166, 201, 237, 465, 706, 706, 707, 707, 729, 729, 730, 730, 731, 731, 862, 864, 912, 917, 917, 922, 922, 950, 1008, 1027, 1033, 1109, 1139 and 864.
- SWC-103 | Pragma statements can be allowed to float when a contract is intended on lines 11.
- SWC-110 SWC-123 | It is recommended to use of revert(), assert(), and require() in Solidity, and the new REVERT opcode in the EVM on lines 863, 864, 864, 949, 1009, 1009, 1010, 1011, 1149 and 1150.

CONCLUSION

We have audited the ShibaCrypt project released on July 2022 to discover issues and identify potential security vulnerabilities in ShibaCrypt Project. This process is used to find technical issues and security loopholes which might be found in the smart contract.

The security audit report provides a satisfactory result with some low-risk issues.

The issues found in the ShibaCrypt smart contract code do not pose a considerable risk. The writing of the contract is close to the standard of writing contracts in general. The low-risk issues found are some arithmetic operation issues, a floating pragma is set, a state variable visibility is not set, and out-of-bounds array access which the index access expression can cause an exception in case of the use of an invalid array index value. It is recommended to specify a fixed compiler version to ensure that the bytecode produced does not vary between builds. This is especially important if you rely on bytecode-level verification of the code.

AUDIT RESULT

Article	Category	Description	Result
Default Visibility	SWC-100 SWC-108	Functions and state variables visibility should be set explicitly. Visibility levels should be specified consciously.	ISSUE FOUND
Integer Overflow and Underflow	SWC-101	If unchecked math is used, all math operations should be safe from overflows and underflows.	ISSUE FOUND
Outdated Compiler Version	SWC-102	It is recommended to use a recent version of the Solidity compiler.	PASS
Floating Pragma	SWC-103	Contracts should be deployed with the same compiler version and flags that they have been tested thoroughly.	ISSUE FOUND
Unchecked Call Return Value	SWC-104	The return value of a message call should be checked.	PASS
Unprotected Ether Withdrawal	SWC-105	Due to missing or insufficient access controls, malicious parties can withdraw from the contract.	PASS
SELFDESTRUCT Instruction	SWC-106	The contract should not be self-destructible while it has funds belonging to users.	PASS
Reentrancy	SWC-107	Check effect interaction pattern should be followed if the code performs recursive call.	PASS
Uninitialized Storage Pointer	SWC-109	Uninitialized local storage variables can point to unexpected storage locations in the contract.	PASS
Assert Violation	SWC-110 SWC-123	Properly functioning code should never reach a failing assert statement.	ISSUE FOUND
Deprecated Solidity Functions	SWC-111	Deprecated built-in functions should never be used.	PASS
Delegate call to Untrusted Callee	SWC-112	Delegatecalls should only be allowed to trusted addresses.	PASS

DoS (Denial of Service)	SWC-113 SWC-128	Execution of the code should never be blocked by a specific contract state unless required.	PASS
Race Conditions	SWC-114	Race Conditions and Transactions Order Dependency should not be possible.	PASS
Authorization through tx.origin	SWC-115	tx.origin should not be used for authorization.	PASS
Block values as a proxy for time	SWC-116	Block numbers should not be used for time calculations.	PASS
Signature Unique ID	SWC-117 SWC-121 SWC-122	Signed messages should always have a unique id. A transaction hash should not be used as a unique id.	PASS
Incorrect Constructor Name	SWC-118	Constructors are special functions that are called only once during the contract creation.	PASS
Shadowing State Variable	SWC-119	State variables should not be shadowed.	PASS
Weak Sources of Randomness	SWC-120	Random values should never be generated from Chain Attributes or be predictable.	PASS
Write to Arbitrary Storage Location	SWC-124	The contract is responsible for ensuring that only authorized user or contract accounts may write to sensitive storage locations.	PASS
Incorrect Inheritance Order	SWC-125	When inheriting multiple contracts, especially if they have identical functions, a developer should carefully specify inheritance in the correct order. The rule of thumb is to inherit contracts from more /general/ to more /specific/.	PASS
Insufficient Gas Griefing	SWC-126	Insufficient gas grieving attacks can be performed on contracts which accept data and use it in a sub-call on another contract.	PASS
Arbitrary Jump Function	SWC-127	As Solidity doesnt support pointer arithmetics, it is impossible to change such variable to an arbitrary value.	PASS

Typographical Error	SWC-129	A typographical error can occur for example when the intent of a defined operation is to sum a number to a variable.	PASS
Override control character	SWC-130	Malicious actors can use the Right-To-Left-Override unicode character to force RTL text rendering and confuse users as to the real intent of a contract.	PASS
Unused variables	SWC-131 SWC-135	Unused variables are allowed in Solidity and they do not pose a direct security issue.	PASS
Unexpected Ether balance	SWC-132	Contracts can behave erroneously when they strictly assume a specific Ether balance.	PASS
Hash Collisions Variable	SWC-133	Using abi.encodePacked() with multiple variable length arguments can, in certain situations, lead to a hash collision.	PASS
Hardcoded gas amount	SWC-134	The transfer() and send() functions forward a fixed amount of 2300 gas.	PASS
Unencrypted Private Data	SWC-136	It is a common misconception that private type variables cannot be read.	PASS

SMART CONTRACT ANALYSIS

Started	Wednesday Jul 06 2022 20:25:22 GMT+0000 (Coordinated Universal Time)
Finished	Thursday Jul 07 2022 02:58:22 GMT+0000 (Coordinated Universal Time)
Mode	Standard
Main Source File	ShibaCrypt.sol

Detected Issues

ID	Title	Severity	Status
SWC-101	ARITHMETIC OPERATION "+" DISCOVERED	low	acknowledged
SWC-101	ARITHMETIC OPERATION "-" DISCOVERED	low	acknowledged
SWC-101	ARITHMETIC OPERATION "*" DISCOVERED	low	acknowledged
SWC-101	ARITHMETIC OPERATION "/" DISCOVERED	low	acknowledged
SWC-101	ARITHMETIC OPERATION "/" DISCOVERED	low	acknowledged
SWC-101	ARITHMETIC OPERATION "%" DISCOVERED	low	acknowledged
SWC-101	ARITHMETIC OPERATION "+" DISCOVERED	low	acknowledged
SWC-101	ARITHMETIC OPERATION "*" DISCOVERED	low	acknowledged
SWC-101	ARITHMETIC OPERATION "**" DISCOVERED	low	acknowledged
SWC-101	ARITHMETIC OPERATION "-" DISCOVERED	low	acknowledged
SWC-101	ARITHMETIC OPERATION "%" DISCOVERED	low	acknowledged
SWC-101	ARITHMETIC OPERATION "*" DISCOVERED	low	acknowledged
SWC-101	ARITHMETIC OPERATION "**" DISCOVERED	low	acknowledged
SWC-101	ARITHMETIC OPERATION "*" DISCOVERED	low	acknowledged

SWC-101	ARITHMETIC OPERATION "**" DISCOVERED	low	acknowledged
SWC-101	ARITHMETIC OPERATION "*" DISCOVERED	low	acknowledged
SWC-101	ARITHMETIC OPERATION "**" DISCOVERED	low	acknowledged
SWC-101	ARITHMETIC OPERATION "++" DISCOVERED	low	acknowledged
SWC-101	ARITHMETIC OPERATION "-" DISCOVERED	low	acknowledged
SWC-101	ARITHMETIC OPERATION "**" DISCOVERED	low	acknowledged
SWC-101	ARITHMETIC OPERATION "*" DISCOVERED	low	acknowledged
SWC-101	ARITHMETIC OPERATION "**" DISCOVERED	low	acknowledged
SWC-101	ARITHMETIC OPERATION "*" DISCOVERED	low	acknowledged
SWC-101	ARITHMETIC OPERATION "**" DISCOVERED	low	acknowledged
SWC-101	ARITHMETIC OPERATION "!=" DISCOVERED	low	acknowledged
SWC-101	ARITHMETIC OPERATION "++" DISCOVERED	low	acknowledged
SWC-101	ARITHMETIC OPERATION "**" DISCOVERED	low	acknowledged
SWC-101	ARITHMETIC OPERATION "**" DISCOVERED	low	acknowledged
SWC-101	ARITHMETIC OPERATION "+" DISCOVERED	low	acknowledged

[illegible]

SWC-101 | ARITHMETIC OPERATION "+" DISCOVERED

LINE 110

low SEVERITY

This plugin produces issues to support false positive discovery within mythril.

Source File

- ShibaCrypt.sol

Locations

```
109 function add(uint256 a, uint256 b) internal pure returns (uint256) {  
110     uint256 c = a + b;  
111     require(c >= a, "SafeMath: addition overflow");  
112  
113     return c;  
114 }
```

SWC-101 | ARITHMETIC OPERATION "-" DISCOVERED

LINE 142

low SEVERITY

This plugin produces issues to support false positive discovery within mythril.

Source File

- ShibaCrypt.sol

Locations

```
141   require(b <= a, errorMessage);  
142   uint256 c = a - b;  
143  
144   return c;  
145   }  
146
```

SWC-101 | ARITHMETIC OPERATION "*" DISCOVERED

LINE 165

low SEVERITY

This plugin produces issues to support false positive discovery within mythril.

Source File

- ShibaCrypt.sol

Locations

```
164
165  uint256 c = a * b;
166  require(c / a == b, "SafeMath: multiplication overflow");
167
168  return c;
169
```

SWC-101 | ARITHMETIC OPERATION "/" DISCOVERED

LINE 166

low SEVERITY

This plugin produces issues to support false positive discovery within mythril.

Source File

- ShibaCrypt.sol

Locations

```
165     uint256 c = a * b;  
166     require(c / a == b, "SafeMath: multiplication overflow");  
167  
168     return c;  
169 }  
170
```

SWC-101 | ARITHMETIC OPERATION "/" DISCOVERED

LINE 201

low SEVERITY

This plugin produces issues to support false positive discovery within mythril.

Source File

- ShibaCrypt.sol

Locations

```
200   require(b > 0, errorMessage);
201   uint256 c = a / b;
202   // assert(a == b * c + a % b); // There is no case in which this doesn't hold
203
204   return c;
205
```


SWC-101 | ARITHMETIC OPERATION "%" DISCOVERED

LINE 237

low SEVERITY

This plugin produces issues to support false positive discovery within mythril.

Source File

- ShibaCrypt.sol

Locations

```
236   require(b != 0, errorMessage);  
237   return a % b;  
238   }  
239   }  
240  
241
```

SWC-101 | ARITHMETIC OPERATION "+" DISCOVERED

LINE 465

low SEVERITY

This plugin produces issues to support false positive discovery within mythril.

Source File

- ShibaCrypt.sol

Locations

```
464   _owner = address(0);  
465   _lockTime = block.timestamp + time;  
466   emit OwnershipTransferred(_owner, address(0));  
467   }  
468  
469
```

SWC-101 | ARITHMETIC OPERATION "*" DISCOVERED

LINE 706

low SEVERITY

This plugin produces issues to support false positive discovery within mythril.

Source File

- ShibaCrypt.sol

Locations

```
705 uint256 private constant MAX = ~uint256(0);
706 uint256 private _tTotal = 1000000000000 * 10**9;
707 uint256 private _rTotal = (MAX - (MAX % _tTotal));
708 uint256 private _tFeeTotal;
709 address public marketingWallet;
710
```

SWC-101 | ARITHMETIC OPERATION "**" DISCOVERED

LINE 706

low SEVERITY

This plugin produces issues to support false positive discovery within mythril.

Source File

- ShibaCrypt.sol

Locations

```
705 uint256 private constant MAX = ~uint256(0);
706 uint256 private _tTotal = 1000000000000 * 10**9;
707 uint256 private _rTotal = (MAX - (MAX % _tTotal));
708 uint256 private _tFeeTotal;
709 address public marketingWallet;
710
```

SWC-101 | ARITHMETIC OPERATION "-" DISCOVERED

LINE 707

low SEVERITY

This plugin produces issues to support false positive discovery within mythril.

Source File

- ShibaCrypt.sol

Locations

```
706 uint256 private _tTotal = 1000000000000 * 10**9;  
707 uint256 private _rTotal = (MAX - (MAX % _tTotal));  
708 uint256 private _tFeeTotal;  
709 address public marketingWallet;  
710  
711
```

SWC-101 | ARITHMETIC OPERATION "%" DISCOVERED

LINE 707

low SEVERITY

This plugin produces issues to support false positive discovery within mythril.

Source File

- ShibaCrypt.sol

Locations

```
706 uint256 private _tTotal = 1000000000000 * 10**9;  
707 uint256 private _rTotal = (MAX - (MAX % _tTotal));  
708 uint256 private _tFeeTotal;  
709 address public marketingWallet;  
710  
711
```

SWC-101 | ARITHMETIC OPERATION "*" DISCOVERED

LINE 729

low SEVERITY

This plugin produces issues to support false positive discovery within mythril.

Source File

- ShibaCrypt.sol

Locations

```
728
729 uint256 public _maxTxAmount = 5000000000 * 10**9;
730 uint256 public numTokensSellToAddToLiquidity = 300000000 * 10**9;
731 uint256 public _maxWalletSize = 10000000000 * 10**9;
732
733
```

SWC-101 | ARITHMETIC OPERATION "**" DISCOVERED

LINE 729

low SEVERITY

This plugin produces issues to support false positive discovery within mythril.

Source File

- ShibaCrypt.sol

Locations

```
728
729 uint256 public _maxTxAmount = 5000000000 * 10**9;
730 uint256 public numTokensSellToAddToLiquidity = 300000000 * 10**9;
731 uint256 public _maxWalletSize = 10000000000 * 10**9;
732
733
```


SWC-101 | ARITHMETIC OPERATION "*" DISCOVERED

LINE 730

low SEVERITY

This plugin produces issues to support false positive discovery within mythril.

Source File

- ShibaCrypt.sol

Locations

```
729 uint256 public _maxTxAmount = 5000000000 * 10**9;  
730 uint256 public numTokensSellToAddToLiquidity = 300000000 * 10**9;  
731 uint256 public _maxWalletSize = 10000000000 * 10**9;  
732  
733 event MinTokensBeforeSwapUpdated(uint256 minTokensBeforeSwap);  
734
```

SWC-101 | ARITHMETIC OPERATION "**" DISCOVERED

LINE 730

low SEVERITY

This plugin produces issues to support false positive discovery within mythril.

Source File

- ShibaCrypt.sol

Locations

```
729 uint256 public _maxTxAmount = 5000000000 * 10**9;  
730 uint256 public numTokensSellToAddToLiquidity = 300000000 * 10**9;  
731 uint256 public _maxWalletSize = 10000000000 * 10**9;  
732  
733 event MinTokensBeforeSwapUpdated(uint256 minTokensBeforeSwap);  
734
```

SWC-101 | ARITHMETIC OPERATION "*" DISCOVERED

LINE 731

low SEVERITY

This plugin produces issues to support false positive discovery within mythril.

Source File

- ShibaCrypt.sol

Locations

```
730 uint256 public numTokensSellToAddToLiquidity = 30000000 * 10**9;  
731 uint256 public _maxWalletSize = 1000000000 * 10**9;  
732  
733 event MinTokensBeforeSwapUpdated(uint256 minTokensBeforeSwap);  
734 event SwapAndLiquifyEnabledUpdated(bool enabled);  
735
```

SWC-101 | ARITHMETIC OPERATION "**" DISCOVERED

LINE 731

low SEVERITY

This plugin produces issues to support false positive discovery within mythril.

Source File

- ShibaCrypt.sol

Locations

```
730 uint256 public numTokensSellToAddToLiquidity = 30000000 * 10**9;  
731 uint256 public _maxWalletSize = 1000000000 * 10**9;  
732  
733 event MinTokensBeforeSwapUpdated(uint256 minTokensBeforeSwap);  
734 event SwapAndLiquifyEnabledUpdated(bool enabled);  
735
```

SWC-101 | ARITHMETIC OPERATION "++" DISCOVERED

LINE 862

low SEVERITY

This plugin produces issues to support false positive discovery within mythril.

Source File

- ShibaCrypt.sol

Locations

```
861   require(!_isExcluded[account], "Account is already excluded");
862   for (uint256 i = 0; i < _excluded.length; i++) {
863       if (_excluded[i] == account) {
864           _excluded[i] = _excluded[_excluded.length - 1];
865           _tOwned[account] = 0;
866       }
```

SWC-101 | ARITHMETIC OPERATION "-" DISCOVERED

LINE 864

low SEVERITY

This plugin produces issues to support false positive discovery within mythril.

Source File

- ShibaCrypt.sol

Locations

```
863     if (_excluded[i] == account) {  
864         _excluded[i] = _excluded[_excluded.length - 1];  
865         _tOwned[account] = 0;  
866         _isExcluded[account] = false;  
867         _excluded.pop();  
868     }
```

SWC-101 | ARITHMETIC OPERATION "**" DISCOVERED

LINE 912

low SEVERITY

This plugin produces issues to support false positive discovery within mythril.

Source File

- ShibaCrypt.sol

Locations

```
911  {  
912  _maxWalletSize = _tTotal.mul(maxWalletSize).div(10**3);  
913  }  
914  
915  function setMaxTxAmount(uint256 maxTxAmount) external onlyOwner() {  
916
```

SWC-101 | ARITHMETIC OPERATION "*" DISCOVERED

LINE 917

low SEVERITY

This plugin produces issues to support false positive discovery within mythril.

Source File

- ShibaCrypt.sol

Locations

```
916   require(maxTxAmount > 10000000, "Max Tx Amount cannot be less than 10 Million");
917   _maxTxAmount = maxTxAmount * 10**9;
918   }
919
920   function setSwapThresholdAmount(uint256 SwapThresholdAmount) external onlyOwner() {
921
```


SWC-101 | ARITHMETIC OPERATION "**" DISCOVERED

LINE 917

low SEVERITY

This plugin produces issues to support false positive discovery within mythril.

Source File

- ShibaCrypt.sol

Locations

```
916   require(maxTxAmount > 10000000, "Max Tx Amount cannot be less than 10 Million");
917   _maxTxAmount = maxTxAmount * 10**9;
918 }
919
920 function setSwapThresholdAmount(uint256 SwapThresholdAmount) external onlyOwner() {
921
```

SWC-101 | ARITHMETIC OPERATION "*" DISCOVERED

LINE 922

low SEVERITY

This plugin produces issues to support false positive discovery within mythril.

Source File

- ShibaCrypt.sol

Locations

```
921   require(SwapThresholdAmount > 10000000, "Swap Threshold Amount cannot be less than
10 Million");
922   numTokensSellToAddToLiquidity = SwapThresholdAmount * 10**9;
923   }
924
925   function claimTokens () public onlyOwner {
926
```

SWC-101 | ARITHMETIC OPERATION "**" DISCOVERED

LINE 922

low SEVERITY

This plugin produces issues to support false positive discovery within mythril.

Source File

- ShibaCrypt.sol

Locations

```
921   require(SwapThresholdAmount > 10000000, "Swap Threshold Amount cannot be less than
10 Million");
922   numTokensSellToAddToLiquidity = SwapThresholdAmount * 10**9;
923   }
924
925   function claimTokens () public onlyOwner {
926
```

SWC-101 | ARITHMETIC OPERATION "+=" DISCOVERED

LINE 950

low SEVERITY

This plugin produces issues to support false positive discovery within mythril.

Source File

- ShibaCrypt.sol

Locations

```
949     addBotWalletsInternal(multiplebotWallets[iterator]);
950     iterator += 1;
951 }
952 }
953
954
```

SWC-101 | ARITHMETIC OPERATION "++" DISCOVERED

LINE 1008

low SEVERITY

This plugin produces issues to support false positive discovery within mythril.

Source File

- ShibaCrypt.sol

Locations

```
1007     uint256 tSupply = _tTotal;
1008     for (uint256 i = 0; i < _excluded.length; i++) {
1009         if (_rOwned[_excluded[i]] > rSupply || _tOwned[_excluded[i]] > tSupply) return
            (_rTotal, _tTotal);
1010         rSupply = rSupply.sub(_rOwned[_excluded[i]]);
1011         tSupply = tSupply.sub(_tOwned[_excluded[i]]);
1012     }
```

SWC-101 | ARITHMETIC OPERATION "**" DISCOVERED

LINE 1027

low SEVERITY

This plugin produces issues to support false positive discovery within mythril.

Source File

- ShibaCrypt.sol

Locations

```
1026     return _amount.mul(_taxFee).div(  
1027         10**2  
1028     );  
1029 }  
1030  
1031
```

SWC-101 | ARITHMETIC OPERATION "**" DISCOVERED

LINE 1033

low SEVERITY

This plugin produces issues to support false positive discovery within mythril.

Source File

- ShibaCrypt.sol

Locations

```
1032     return _amount.mul(_liquidityFee).div(  
1033         10**2  
1034     );  
1035 }  
1036  
1037
```

SWC-101 | ARITHMETIC OPERATION "+" DISCOVERED

LINE 1109

low SEVERITY

This plugin produces issues to support false positive discovery within mythril.

Source File

- ShibaCrypt.sol

Locations

```
1108     require(  
1109     amount + balanceOf(to) <= _maxWalletSize,  
1110     "Recipient exceeds max wallet size."  
1111     );  
1112 }  
1113
```


SWC-101 | ARITHMETIC OPERATION "-=" DISCOVERED

LINE 1139

low SEVERITY

This plugin produces issues to support false positive discovery within mythril.

Source File

- ShibaCrypt.sol

Locations

```
1138 payable(marketingWallet).transfer(marketingshare);  
1139 newBalance -= marketingshare;  
1140 // add liquidity to uniswap  
1141 addLiquidity(otherHalf, newBalance);  
1142  
1143
```

SWC-101 | COMPILER-REWRITABLE "<UINT> - 1" DISCOVERED

LINE 864

low SEVERITY

This plugin produces issues to support false positive discovery within mythril.

Source File

- ShibaCrypt.sol

Locations

```
863     if (_excluded[i] == account) {  
864         _excluded[i] = _excluded[_excluded.length - 1];  
865         _tOwned[account] = 0;  
866         _isExcluded[account] = false;  
867         _excluded.pop();  
868     }
```

SWC-103 | A FLOATING PRAGMA IS SET.

LINE 11

low SEVERITY

The current pragma Solidity directive is `""^0.8.9""`. It is recommended to specify a fixed compiler version to ensure that the bytecode produced does not vary between builds. This is especially important if you rely on bytecode-level verification of the code.

Source File

- ShibaCrypt.sol

Locations

```
10
11  pragma solidity ^0.8.9;
12  // SPDX-License-Identifier: Unlicensed
13  interface IERC20 {
14
15
```

SWC-108 | STATE VARIABLE VISIBILITY IS NOT SET.

LINE 701

low SEVERITY

It is best practice to set the visibility of state variables explicitly. The default visibility for "botscantrade" is internal. Other possible visibility settings are public and private.

Source File

- ShibaCrypt.sol

Locations

```
700 mapping (address => bool) private botWallets;  
701 bool botscantrade = false;  
702  
703 bool public canTrade = false;  
704  
705
```

SWC-108 | STATE VARIABLE VISIBILITY IS NOT SET.

LINE 726

low SEVERITY

It is best practice to set the visibility of state variables explicitly. The default visibility for "inSwapAndLiquify" is internal. Other possible visibility settings are public and private.

Source File

- ShibaCrypt.sol

Locations

```
725
726  bool inSwapAndLiquify;
727  bool public swapAndLiquifyEnabled = true;
728
729  uint256 public _maxTxAmount = 5000000000 * 10**9;
730
```

SWC-110 | OUT OF BOUNDS ARRAY ACCESS

LINE 863

low SEVERITY

The index access expression can cause an exception in case of use of invalid array index value.

Source File

- ShibaCrypt.sol

Locations

```
862   for (uint256 i = 0; i < _excluded.length; i++) {  
863     if (_excluded[i] == account) {  
864       _excluded[i] = _excluded[_excluded.length - 1];  
865       _tOwned[account] = 0;  
866       _isExcluded[account] = false;  
867     }
```

SWC-110 | OUT OF BOUNDS ARRAY ACCESS

LINE 864

low SEVERITY

The index access expression can cause an exception in case of use of invalid array index value.

Source File

- ShibaCrypt.sol

Locations

```
863     if (_excluded[i] == account) {  
864         _excluded[i] = _excluded[_excluded.length - 1];  
865         _tOwned[account] = 0;  
866         _isExcluded[account] = false;  
867         _excluded.pop();  
868     }
```

SWC-110 | OUT OF BOUNDS ARRAY ACCESS

LINE 864

low SEVERITY

The index access expression can cause an exception in case of use of invalid array index value.

Source File

- ShibaCrypt.sol

Locations

```
863     if (_excluded[i] == account) {  
864         _excluded[i] = _excluded[_excluded.length - 1];  
865         _tOwned[account] = 0;  
866         _isExcluded[account] = false;  
867         _excluded.pop();  
868     }
```


SWC-110 | OUT OF BOUNDS ARRAY ACCESS

LINE 949

low SEVERITY

The index access expression can cause an exception in case of use of invalid array index value.

Source File

- ShibaCrypt.sol

Locations

```
948 while(iterator < multiplebotWallets.length){  
949   addBotWalletsInternal(multiplebotWallets[iterator]);  
950   iterator += 1;  
951 }  
952 }  
953
```

SWC-110 | OUT OF BOUNDS ARRAY ACCESS

LINE 1009

low SEVERITY

The index access expression can cause an exception in case of use of invalid array index value.

Source File

- ShibaCrypt.sol

Locations

```
1008   for (uint256 i = 0; i < _excluded.length; i++) {  
1009     if (_rOwned[_excluded[i]] > rSupply || _tOwned[_excluded[i]] > tSupply) return  
      (_rTotal, _tTotal);  
1010     rSupply = rSupply.sub(_rOwned[_excluded[i]]);  
1011     tSupply = tSupply.sub(_tOwned[_excluded[i]]);  
1012   }  
1013
```

SWC-110 | OUT OF BOUNDS ARRAY ACCESS

LINE 1009

low SEVERITY

The index access expression can cause an exception in case of use of invalid array index value.

Source File

- ShibaCrypt.sol

Locations

```
1008   for (uint256 i = 0; i < _excluded.length; i++) {  
1009     if (_rOwned[_excluded[i]] > rSupply || _tOwned[_excluded[i]] > tSupply) return  
      (_rTotal, _tTotal);  
1010     rSupply = rSupply.sub(_rOwned[_excluded[i]]);  
1011     tSupply = tSupply.sub(_tOwned[_excluded[i]]);  
1012   }  
1013
```

SWC-110 | OUT OF BOUNDS ARRAY ACCESS

LINE 1010

low SEVERITY

The index access expression can cause an exception in case of use of invalid array index value.

Source File

- ShibaCrypt.sol

Locations

```
1009  if (_rOwned[_excluded[i]] > rSupply || _tOwned[_excluded[i]] > tSupply) return
      (_rTotal, _tTotal);
1010  rSupply = rSupply.sub(_rOwned[_excluded[i]]);
1011  tSupply = tSupply.sub(_tOwned[_excluded[i]]);
1012  }
1013  if (rSupply < _rTotal.div(_tTotal)) return (_rTotal, _tTotal);
1014
```

SWC-110 | OUT OF BOUNDS ARRAY ACCESS

LINE 1011

low SEVERITY

The index access expression can cause an exception in case of use of invalid array index value.

Source File

- ShibaCrypt.sol

Locations

```
1010 rSupply = rSupply.sub(_rOwned[_excluded[i]]);
1011 tSupply = tSupply.sub(_tOwned[_excluded[i]]);
1012 }
1013 if (rSupply < _rTotal.div(_tTotal)) return (_rTotal, _tTotal);
1014 return (rSupply, tSupply);
1015
```

SWC-110 | OUT OF BOUNDS ARRAY ACCESS

LINE 1149

low SEVERITY

The index access expression can cause an exception in case of use of invalid array index value.

Source File

- ShibaCrypt.sol

Locations

```
1148 address[] memory path = new address[](2);
1149 path[0] = address(this);
1150 path[1] = uniswapV2Router.WETH();
1151
1152 _approve(address(this), address(uniswapV2Router), tokenAmount);
1153
```

SWC-110 | OUT OF BOUNDS ARRAY ACCESS

LINE 1150

low SEVERITY

The index access expression can cause an exception in case of use of invalid array index value.

Source File

- ShibaCrypt.sol

Locations

```
1149 path[0] = address(this);  
1150 path[1] = uniswapV2Router.WETH();  
1151  
1152 _approve(address(this), address(uniswapV2Router), tokenAmount);  
1153  
1154
```

DISCLAIMER

This report is subject to the terms and conditions (including without limitation, description of services, confidentiality, disclaimer and limitation of liability) set forth in the Services Agreement, or the scope of services, and terms and conditions provided to you ("Customer" or the "Company") in connection with the Agreement. This report provided in connection with the Services set forth in the Agreement shall be used by the Company only to the extent permitted under the terms and conditions set forth in the Agreement. This report may not be transmitted, disclosed, referred to, or relied upon by any person for any purposes, nor may copies be delivered to any other person other than the Company, without Sysfixed's prior written consent in each instance.

This report is not, nor should be considered, an "endorsement" or "disapproval" of any particular project or team. This report is not, nor should be considered, an indication of the economics or value of any "product" or "asset" created by any team or project that contracts Sysfixed to perform a security assessment. This report does not provide any warranty or guarantee regarding the absolute bug-free nature of the technology analyzed, nor do they provide any indication of the technologies proprietors, business, business model, or legal compliance.

This is a limited report on our findings based on our analysis, in accordance with good industry practice as of the date of this report, in relation to cybersecurity vulnerabilities and issues in the framework and algorithms based on smart contracts, the details of which are set out in this report. In order to get a full view of our analysis, it is crucial for you to read the full report. While we have done our best in conducting our analysis and producing this report, it is important to note that you should not rely on this report and cannot claim against us on the basis of what it says or doesn't say, or how we produced it, and it is important for you to conduct your own independent investigations before making any decisions. We go into more detail on this in the below disclaimer below – please make sure to read it in full.

This report should not be used in any way to make decisions around investment or involvement with any particular project. This report in no way provides investment advice, nor should be leveraged as investment advice of any sort. This report represents an extensive assessing process intending to help our customers increase the quality of their code while reducing the high level of risk presented by cryptographic tokens and blockchain technology.

This report is provided for information purposes only and on a non-reliance basis and does not constitute investment advice. No one shall have any right to rely on the report or its contents, and Sysfixed and its affiliates (including holding companies, shareholders, subsidiaries, employees, directors, officers, and other representatives) (Sysfixed) owe no duty of care.

ABOUT US

Sysfixed is a blockchain security certification organization established in 2021 with the objective to provide smart contract security services and verify their correctness in blockchain-based protocols. Sysfixed automatically scans for security vulnerabilities in Ethereum and other EVM-based blockchain smart contracts. Sysfixed a comprehensive range of analysis techniques—including static analysis, dynamic analysis, and symbolic execution—can accurately detect security vulnerabilities to provide an in-depth analysis report. With a vibrant ecosystem of world-class integration partners that amplify developer productivity, Sysfixed can be utilized in all phases of your project's lifecycle. Our team of security experts is dedicated to the research and improvement of our tools and techniques used to fortify your code.